



2 LIGHT SLIDER

100 Series



Features


- **CLEAR** glass or **LOW-E** with **ARGON GAS**
- **SILL EXTENSION** with dual durometer for ease of installation
- **EXTRUDED** ½ screen with **BETTER VUE®** screening (provides improved visibility, enhanced insect performance, air flow and light transmission)
- **INTERNAL ALUMINUM REINFORCEMENT**
- **FULLY WELDED FRAME & SASH**
- **BOTH SASHES SLIDE**
- **FULL INTERLOCK AT THE MEETING RAIL**
- **LIFT OUT SASH** for easy cleaning from the inside
- **DOUBLE LOCKS** included on heights of 27½" and over
- **3¼" FULLY WELDED FRAME**

Think about this:

The **spacer system** you choose is just as important as the window!

That's why we use:

Super Spacer®
SEALED

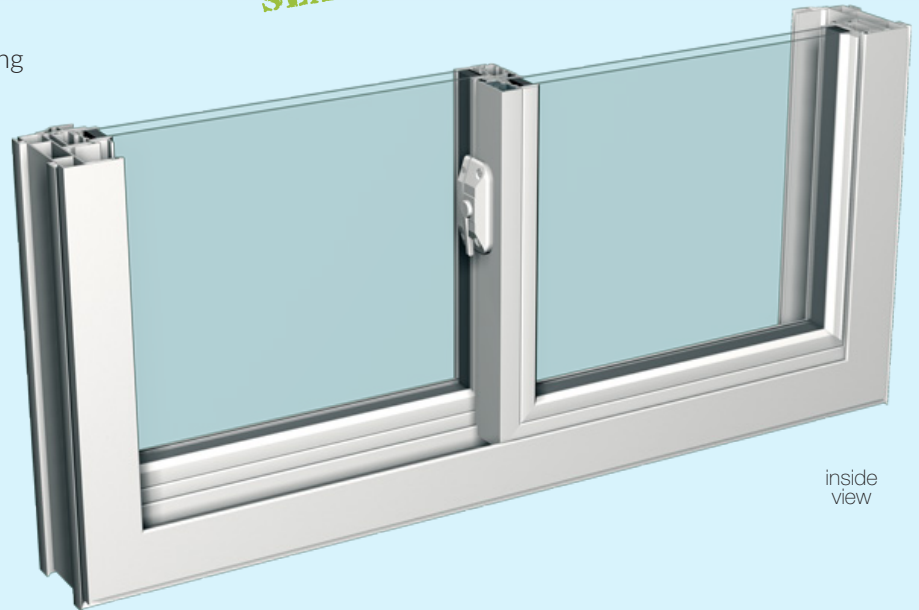

inside view

MANUFACTURING LIMITS

MANUFACTURING INCREMENTS - WIDTH AND HEIGHT EVERY ⅛" INCH

MINIMUM WIDTH 24⅛" MINIMUM HEIGHT 14⅛"

MAXIMUM WIDTH 76" MAXIMUM HEIGHT 64"

MAXIMUM WIDTH + HEIGHT = 128" UI

Window Options

also available in

CLEAR GLASS

and

**Privacy Plus Performance
OBSCURED GLASS**



Grids are installed between the glass panes during manufacturing for easy cleaning

GRID DETAILS for traditional grids

GRIDS PATTERNS



FLAT GRIDS



CONTOUR GRIDS